



Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH

**Research
Report**
RR-93-41

**LAYLAB:
A Constraint-Based Layout Manager for
Multimedia Presentations**

Winfried H. Graf

August 1993

**Deutsches Forschungszentrum für Künstliche Intelligenz
GmbH**

Postfach 20 80
67608 Kaiserslautern, FRG
Tel.: (+49 631) 205-3211/13
Fax: (+49 631) 205-3210

Stuhlsatzenhausweg 3
66123 Saarbrücken, FRG
Tel.: (+49 681) 302-5252
Fax: (+49 681) 302-5341

Deutsches Forschungszentrum für Künstliche Intelligenz

The German Research Center for Artificial Intelligence (Deutsches Forschungszentrum für Künstliche Intelligenz, DFKI) with sites in Kaiserslautern and Saarbrücken is a non-profit organization which was founded in 1988. The shareholder companies are Atlas Elektronik, Daimler-Benz, Fraunhofer Gesellschaft, GMD, IBM, Insiders, Mannesmann-Kienzle, SEMA Group, Siemens and Siemens-Nixdorf. Research projects conducted at the DFKI are funded by the German Ministry for Research and Technology, by the shareholder companies, or by other industrial contracts.

The DFKI conducts application-oriented basic research in the field of artificial intelligence and other related subfields of computer science. The overall goal is to construct *systems with technical knowledge and common sense* which - by using AI methods - implement a problem solution for a selected application area. Currently, there are the following research areas at the DFKI:

- Intelligent Engineering Systems
- Intelligent User Interfaces
- Computer Linguistics
- Programming Systems
- Deduction and Multiagent Systems
- Document Analysis and Office Automation.

The DFKI strives at making its research results available to the scientific community. There exist many contacts to domestic and foreign research institutions, both in academy and industry. The DFKI hosts technology transfer workshops for shareholders and other interested groups in order to inform about the current state of research.

From its beginning, the DFKI has provided an attractive working environment for AI researchers from Germany and from all over the world. The goal is to have a staff of about 100 researchers at the end of the building-up phase.

Friedrich J. Wendl
Director

This report is a revised version of a paper that is published in G. Salvendy and M. J. Smith (Eds.), Proceedings of HCI International'93 (5th International Conference on Human-Computer Interaction jointly with 9th Symposium on Human Factors in Computing Systems), Seattle, WA, 1993.

**LAYLAB:
A Constraint-Based Layout Manager for Multimedia Presentations**

Winfried H. Graf
This work has been supported by a grant from The Federal Ministry of Science and Technology (FKZ ITW-8901-8)

DFKI-RR-93-41

© Deutsches Forschungszentrum für Künstliche-Intelligenz 1993
This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such whole or partial copies include the following: a notice that such copying is by permission of Deutsches Forschungszentrum für Künstliche-Intelligenz, Kaiserslautern, Federal Republic of Germany; an acknowledgment of the authors and individual contributors to the work; all applicable portions of this copyright notice. Copying, reproducing, or republishing for any other purpose shall require a license with payment of fee to Deutsches Forschungszentrum für Künstliche-Intelligenz.

This report is a revised version of a paper that is published in G. Salvendy and M. J. Smith (Eds.), *Proceedings of HCI International'93 (5th International Conference on Human-Computer Interaction jointly with 9th Symposium on Human Interface, Japan)*, Amsterdam: Elsevier, 1993, pp. 446-451.

This work has been supported by a grant from The Federal Ministry for Research and Technology (FKZ ITW-8901 8).

DFKI-RR-93-11

© Deutsches Forschungszentrum für Künstliche Intelligenz 1993

This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such whole or partial copies include the following: a notice that such copying is by permission of Deutsches Forschungszentrum für Künstliche Intelligenz, Kaiserslautern, Federal Republic of Germany; an acknowledgement of the authors and individual contributors to the work; all applicable portions of this copyright notice. Copying, reproducing, or republishing for any other purpose shall require a licence with payment of fee to Deutsches Forschungszentrum für Künstliche Intelligenz.

Contents
1 Introduction
2 Related Work
3 Adaptive Multimedia Layout
4 The Architecture of the LayLab
5 Introduction
6 Conclusions and Future Work

LAYLAB: A Constraint-Based Layout Manager for Multimedia Presentations

Winfried H. Graf

German Research Center for Artificial Intelligence (DFKI)

Stuhlsatzenhausweg 3, D-66123 Saarbrücken, Germany

Phone: (+49 681) 302-5264

Fax: (+49 681) 302-5341

E-mail: graf@dfki.uni-sb.de

Abstract

When developing advanced intelligent user interfaces composing text, graphics, animation, hypermedia etc., the question of automatically designing the graphical layout of such multimedia presentations in an appropriate format plays a crucial role. This paper introduces the task, the functionality and the architecture of the constraint-based multimedia layout manager LayLab.

Contents

1	Introduction	3
2	Related Research	3
3	Adaptive Multimedia Layout	4
4	The Architecture of the LayLab System	4
5	Integration and Implementation	6
6	Conclusions and Future Work	7

Abstract

When developing advanced intelligent user interfaces composing text, graphics, animation, hypermedia etc., the question of automatically designing the graphical layout of such multimedia presentations in an appropriate format plays a crucial role. This paper introduces the task, the functionality and the architecture of the constraint-based multimedia layout manager LayLab.

1 Introduction

Due to the growing complexity of information that has to be communicated by current AI systems, there comes an increasing need for building sophisticated intelligent user interfaces that take advantage of a coordinated combination of different media and modalities, including graphics, canned and generated text, animation, hypermedia, virtual realities etc., to produce a flexible and efficient information presentation. Therefore, to communicate generated multimodal information to the user in an expressive and effective manner, a knowledge-based layout component should be an integral element of each intelligent multimedia presentation system. A layout manager has at its disposal a wide range of multimedia output and will seek to combine these to best effect. In order to achieve a coherent and consistent output, it must be able to reflect certain semantic and pragmatic relations specified by a presentation planner [Rist & André 93].

As with many other interesting AI design problems, the determination of an aesthetically pleasing layout can be viewed as a discrete combinatorial problem. In this paper, we will illustrate the exploitation of advanced constraint processing techniques such as constraint hierarchies, intelligent backtracking mechanisms and incremental compilation by the example of the *LayLab* testbed system [Graf 92], the automatic layout manager of the multimedia presentation system *WIP* (Knowledge-based Presentation of Information, cf. [Wahlster et al. 92, André et al. 93]). *LayLab* addresses a dynamic adaptation of multimedia presentations to achieve an expressive and effective output with high coherence. Here, we view layout as an important carrier of meaning.

2 Related Research

As graphics hardware becomes more and more sophisticated, computer-based multimedia communication achieves a crucial role in intelligent user interfaces (cf. [Sullivan & Tyler 91, Ortony et al. 92, Catarci et al. 92, Maybury 93]). While much work in this area has been focused on the automatic synthesis of graphics, the automatic layout design of multimedia presentations has only recently received significant attention in artificial intelligence research. Some interesting early efforts focused on rules and design grids to automating display layout (e.g., [Beach 85, Feiner 88]). Recent approaches investigate more sophisticated techniques such as constraint-based and case-based reasoning methods for representing graphical design knowledge (e.g., [MacNeil 90, Graf 91]). The importance of a deeper treatment of multimodal constraints in information presentation in order to address the ergonomic aspects of layout has also been stressed by [Dale 92].

Further representative research related to in this paper entered the area between interactive graphics and constraint systems, e.g., the constraint-oriented simulation

laboratory *ThingLab* [Borning 81, Maloney et al. 89] developed at Xerox PARC. Up to now only rudimentary work has been done in the area of layout of dynamic presentations. *Animus* [Duisberg 87] is one of the first systems that allows for easy construction of an animation with minimal concern for lower-level graphics programming. Here temporal constraints are used to describe the appearance and structure of a picture as well as as how those pictures evolve in time. In an application of the *Kaleidoscope* language [Freeman-Benson 90], temporal constraints are used to update the display of graphical objects which are manipulated by mouse actions interactively and maintain their consistency requirements.

The importance of the text layout dimension has also been stressed by recent work at USC/ISI [Hovy & Arens 91] that involves the generation of formatted text exploiting the communicative function of so-called textual devices.

3 Adaptive Multimedia Layout

A fundamental goal of our work is to construct a universal framework for automatic layout management, as an integrated component of a multimedia presentation system, that makes intelligent use of human visual abilities and design parameters whenever arranging multimedia output in any kind of presentation. Thus, from the functional viewpoint the main task of a knowledge-based layout manager is to convey certain semantic and pragmatic relations specified by a presentation planner to arrange the visual appearance of a mixture of multimedia fragments delivered by media-specific generators, i.e., to determine the precise size of the individual layout elements and the exact coordinates for positioning them in the presentation space (see Fig. 1). LayLab deals with page layout as a rhetorical force, influencing the intentional and attentional state of the reader.

One of our major design goals is the generation of highly adaptive interfaces which can be tailored to the needs and requirements of an intended target audience and situation. So, the generation of a layout is controlled by a set of design parameters such as user's layout preferences, presentation type, presentation intention, output mode (incremental vs. complete only), resource limitations, output medium, and more.

4 The Architecture of the LayLab System

The design of LayLab's conceptual architecture follows a modular approach embedding a positioning component, a grid generation module, an intelligent typographer, a document beautifier and an interaction handler (see Fig. 2).

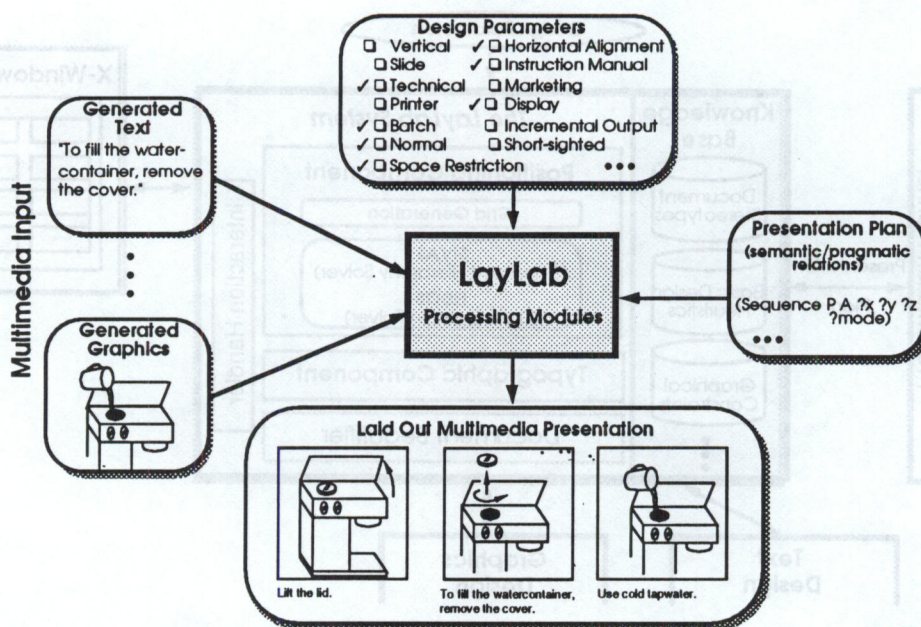


Figure 1: A Functional View on LayLab

A central idea underlying automatic layout of multimedia presentations is the incorporation of application domain-specific knowledge as well as commonsense knowledge about basic design heuristics into the design process, i.e., an encoding of procedural and declarative geometric knowledge (cf. also [Graf 92]). We use automatically generated superimposed grid structures as an ordering framework for efficiently designing functional layouts. As has been proven in previous work (e.g., [Graf 91]), constraint processing techniques provide an elegant mechanism to specify layout requirements in graphical environments as well as to declaratively state design-relevant knowledge about heterogeneous geometrical relationships, characterizing properties between different kinds of multimedia items that can be maintained by the underlying system.

Therefore, Laylab exploits a sophisticated constraint solver model comprising two dedicated solvers for handling different kinds of graphical constraints defined on constraint hierarchies and finite domains. An incremental constraint hierarchy solver based on the *DeltaBlue* algorithm [Freeman-Benson et al. 90] and a domain solver that handles finite domains using forward checking (cf. [Hentenryck 89]) are integrated in a layered model and are triggered from a common meta level by rules and defaults. The underlying constraint language is able to encode graphical design knowledge expressed by semantic/pragmatic, geometrical/topological, and temporal relations. As in interactive graphical environments constraints frequently have only local effects and the constraint solver must be capable of finding solutions without reducing the direct manipulation responsiveness, they have to be incrementally generated by the system on the fly. The text layout problem has also been addressed

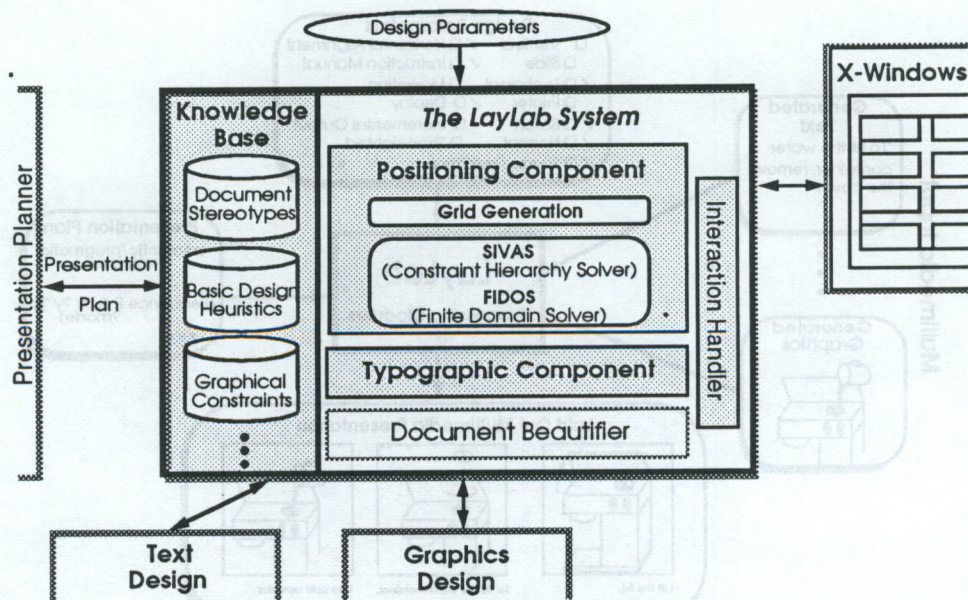


Figure 2: The Architecture of LayLab

by a constraint-based approach. Here, high-level specifications of relations between textual devices are expressed by constraints which can be compiled into low-level text formatting routines.

5 Integration and Implementation

Considering this architecture, a complete layout design is achieved stepwise via a refinement process. So, layout considerations can influence the early stages of the presentation planning process and constrain the media-specific generators. To handle dependencies between content generation and layout generation, WIP enables bidirectional communication to take place between the layout manager and the presentation planner. In case a revision of layout is deemed necessary layout manager and presentation planner must negotiate.

A prototype version of the LayLab system has been implemented on a Symbolics XL 1200 Lisp machine and several MacIvory workstations under Genera 8.0 using Symbolics Common Lisp/CLOS and Flavors for object-oriented interface programming and it is fully integrated in the overall WIP system.

6 Conclusions and Future Work

As a first step towards a conceptual framework for managing layout of multimedia presentations we have outlined the architecture of the multimedia layout manager LayLab. While the previous work has concentrated on constraint formalisms for supporting the layout design of static text-picture presentations, most of our current research is concerned with generalizing this constraint-based approach towards interactive layout design including further modalities like dynamic and canned presentation parts (e.g., hypermedia, animation, video). Here, the layout manager will be concerned with arranging the generated multimedia output as well as managing the interface to the user and the application. Since animated multimedia presentations can enhance the effectiveness and expressiveness of both, the visualization of the incremental layout process and dynamic application scenarios, animated layout is another area of our future research. A next version of the system will allow the user to tailor the interface to his needs by editing incrementally laid out presentations, changing default layout schemata interactively or working on virtual displays.

Acknowledgements

The research reported in this paper has been carried out in the WIP project which is supported by the German Ministry for Research and Technology under contract ITW 8901 8. I would like to thank Wolfgang Wahlster, Elisabeth André and Thomas Rist for valuable comments on this work. The implementation has benefited from the contributions of our students Wolfgang Maaß, Stefan Neurohr and Dudung Soetopo.

References

- [André et al. 93] E. André, W. Finkler, W. Graf, T. Rist, A. Schauder, and W. Wahlster. *WIP: The Automatic Synthesis of Multimodal Presentations*. In: Maybury [Maybury 93]. Forthcoming.
- [Beach 85] R. Beach. *Setting Tables and Illustrations with Style*. Dissertation, Dept. of Computer Science, University of Waterloo, Ontario, 1985.
- [Borning 81] A. Borning. *The Programming Language Aspects of ThingLab, a Constraint-oriented Simulation Laboratory*. ACM Transactions on Programming Languages and Systems, 3(4):353–387, October 1981.
- [Catarci et al. 92] T. Catarci, M. F. Costabile, and S. Levialdi (Hrsg.). *Advanced Visual Interfaces, Proceedings of the International Workshop AVI*

'92. World Scientific Series in Computer Science - Vol. 36. Singapore: World Scientific Press, 1992.

- [Dale 92] R. Dale. *Visible Language: Multimedia Constraints in Information Presentation*. In: R. Dale, E. Hovy, D. Rösner, und O. Stock (Hrsg.), *Aspects of Automated Natural Language Generation*, S. 281–283. Berlin, Germany: Springer-Verlag, 1992.
- [Duisberg 87] R. Duisberg. *Animation Using Temporal Constraints: An Overview of the Animus System*. In: *Human-Computer Interaction*, S. 275–307. Hillsdale, NJ: Lawrence Erlbaum Associates, 1987.
- [Feiner 88] S. Feiner. *A Grid-Based Approach to Automating Display Layout*. In: *Proceedings of the Graphics Interface '88*, S. 192–197. Los Altos, CA: Morgan Kaufmann, June 1988.
- [Freeman-Benson et al. 90] B. Freeman-Benson, J. Maloney, und A. Borning. *An Incremental Constraint Solver*. *Communications of the ACM*, 33(1):54–63, 1990.
- [Freeman-Benson 90] B. Freeman-Benson. *Kaleidoscope: Mixing Objects, Constraints, and Imperative Programming*. In: N. Meyrowitz (Hrsg.), *Proceedings of ECOOP-OOPSLA '90*, S. 77–88, Ottawa, Canada, October 1990.
- [Graf 91] W. Graf. *Constraint-Based Processing of Design Knowledge*. In: *Proceedings of the AAAI-91 Workshop on 'Intelligent Multimedia Interfaces'*, Anaheim, CA, July 1991.
- [Graf 92] W. Graf. *Constraint-Based Graphical Layout of Multimodal Presentations*. In: Catarci et al. [Catarci et al. 92], S. 365–385. Also DFKI Research Report RR-92-15.
- [Hentenryck 89] P. Van Hentenryck. *Constraint Satisfaction in Logic Programming*. Cambridge, MA: MIT Press, 1989. Revision of Ph.D. thesis, University of Namur, 1987.
- [Hovy & Arens 91] E. Hovy und Y. Arens. *Automatic Generation of Formatted Text*. In: *Proceedings of the 9th National Conference of the American Association for Artificial Intelligence*, S. 92–97, Anaheim, CA, July 1991.
- [MacNeil 90] R. MacNeil. *Adaptive Perspectives: Case-based Reasoning with TYRO, the Graphics Designer's Apprentice*. In: *Proceedings of the IEEE Workshop on Visual Languages*, 1990.
- [Maloney et al. 89] J. Maloney, A. Borning, und B. Freeman-Benson. *Constraint Technology for User-Interface Construction in ThingLabII*. In: *Proceedings of OOPSLA '89 (Object-Oriented Programming Systems, Languages, and Applications)*, S. 381–388, October 1989.


[Maybury 93] M. Maybury (Hrsg.). *Intelligent Multimedia Interfaces*. Menlo Park, CA: AAAI Press, 1993. Forthcoming.

[Ortony et al. 92] A. Ortony, J. Slack, und O. Stock (Hrsg.). *Communication from an Artificial Intelligence Perspective: Theoretical and Applied Issues*. Berlin, Germany: Springer-Verlag, 1992. In press.

[Rist & André 93] T. Rist und E. André. *Designing Coherent Multi-Media Presentations*. In: G. Salvendy und M. J. Smith (Hrsg.), Proceedings of HCI International'93 (5th International Conference on Human-Computer Interaction jointly with 9th Symposium on Human Interface (Japan)), S. 434-439, Amsterdam, 1993. Elsevier.

[Sullivan & Tyler 91] J. Sullivan und S. Tyler (Hrsg.). *Intelligent User Interfaces*. Frontier Series. New York, NY: ACM Press, 1991.

[Wahlster et al. 92] W. Wahlster, E. André, S. Bandyopadhyay, W. Graf, und T. Rist. *WIP: The Coordinated Generation of Multimodal Presentations from a Common Representation*. In: Ortony et al. [Ortony et al. 92], S. 121-144. Also DFKI Research Report RR-91-08.



**Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH**

**DFKI
-Bibliothek-
PF 2080
67608 Kaiserslautern
FRG**

DFKI Publikationen

Die folgenden DFKI Veröffentlichungen sowie die aktuelle Liste von allen bisher erschienenen Publikationen können von der oben angegebenen Adresse bezogen werden.
Die Berichte werden, wenn nicht anders gekennzeichnet, kostenlos abgegeben.

DFKI Publications

The following DFKI publications or the list of all published papers so far can be ordered from the above address.

The reports are distributed free of charge except if otherwise indicated.

DFKI Research Reports

RR-92-40

Philipp Hanschke, Knut Hinkelmann: Combining Terminological and Rule-based Reasoning for Abstraction Processes
17 pages

RR-92-41

Andreas Lux: A Multi-Agent Approach towards Group Scheduling
32 pages

RR-92-42

John Nerbonne:
A Feature-Based Syntax/Semantics Interface
19 pages

RR-92-43

Christoph Klauck, Jakob Mauss: A Heuristic driven Parser for Attributed Node Labeled Graph Grammars and its Application to Feature Recognition in CIM
17 pages

RR-92-44

Thomas Rist, Elisabeth André: Incorporating Graphics Design and Realization into the Multimodal Presentation System WIP
15 pages

RR-92-45

Elisabeth André, Thomas Rist: The Design of Illustrated Documents as a Planning Task
21 pages

RR-92-46

Elisabeth André, Wolfgang Finkler, Winfried Graf, Thomas Rist, Anne Schauder, Wolfgang Wahlster:
WIP: The Automatic Synthesis of Multimodal Presentations
19 pages

RR-92-47

Frank Bomarius: A Multi-Agent Approach towards Modeling Urban Traffic Scenarios
24 pages

RR-92-48

Bernhard Nebel, Jana Koehler:
Plan Modifications versus Plan Generation: A Complexity-Theoretic Perspective
15 pages

RR-92-49

Christoph Klauck, Ralf Legleitner, Ansgar Bernardi:
Heuristic Classification for Automated CAPP
15 pages

RR-92-50

Stephan Busemann:
Generierung natürlicher Sprache
61 Seiten

RR-92-51

Hans-Jürgen Bürckert, Werner Nutt:
On Abduction and Answer Generation through Constrained Resolution
20 pages

RR-92-52

Mathias Bauer, Susanne Biundo, Dietmar Dengler, Jana Koehler, Gabriele Paul: PHI - A Logic-Based Tool for Intelligent Help Systems
14 pages

RR-92-53

Werner Stephan, Susanne Biundo:
A New Logical Framework for Deductive Planning
15 pages

RR-92-54

Harold Boley: A Direkt Semantic Characterization of RELFUN
30 pages

RR-92-55

John Nerbonne, Joachim Laubsch, Abdel Kader Diagne, Stephan Oepen: Natural Language Semantics and Compiler Technology
17 pages

RR-92-56

Armin Laux: Integrating a Modal Logic of Knowledge into Terminological Logics
34 pages

RR-92-58

Franz Baader, Bernhard Hollunder:
How to Prefer More Specific Defaults in Terminological Default Logic
31 pages

RR-92-59

Karl Schlechta and David Makinson: On Principles and Problems of Defeasible Inheritance
13 pages

RR-92-60

Karl Schlechta: Defaults, Preorder Semantics and Circumscription
19 pages

RR-93-02

Wolfgang Wahlster, Elisabeth André, Wolfgang Finkler, Hans-Jürgen Profilich, Thomas Rist: Plan-based Integration of Natural Language and Graphics Generation
50 pages

RR-93-03

Franz Baader, Bernhard Hollunder, Bernhard Nebel, Hans-Jürgen Profilich, Enrico Franconi: An Empirical Analysis of Optimization Techniques for Terminological Representation Systems
28 pages

RR-93-04

Christoph Klauck, Johannes Schwagereit: GGD: Graph Grammar Developer for features in CAD/CAM
13 pages

RR-93-05

Franz Baader, Klaus Schulz: Combination Techniques and Decision Problems for Disunification
29 pages

RR-93-06

Hans-Jürgen Bürckert, Bernhard Hollunder, Armin Laux: On Skolemization in Constrained Logics
40 pages

RR-93-07

Hans-Jürgen Bürckert, Bernhard Hollunder, Armin Laux: Concept Logics with Function Symbols
36 pages

RR-93-08

Harold Boley, Philipp Hanschke, Knut Hinkelmann, Manfred Meyer: COLAB: A Hybrid Knowledge Representation and Compilation Laboratory
64 pages

RR-93-09

Philipp Hanschke, Jörg Würtz: Satisfiability of the Smallest Binary Program
8 Seiten

RR-93-10

Martin Buchheit, Francesco M. Donini, Andrea Schaerf: Decidable Reasoning in Terminological Knowledge Representation Systems
35 pages

RR-93-11

Bernhard Nebel, Hans-Juergen Buerckert: Reasoning about Temporal Relations: A Maximal Tractable Subclass of Allen's Interval Algebra
28 pages

RR-93-12

Pierre Sablayrolles: A Two-Level Semantics for French Expressions of Motion
51 pages

RR-93-13

Franz Baader, Karl Schlechta: A Semantics for Open Normal Defaults via a Modified Preferential Approach
25 pages

RR-93-14

Joachim Niehren, Andreas Podelski, Ralf Treinen: Equational and Membership Constraints for Infinite Trees
33 pages

RR-93-15

Frank Berger, Thomas Fehrle, Kristof Klöckner, Volker Schölles, Markus A. Thies, Wolfgang Wahlster: PLUS - Plan-based User Support
Final Project Report
33 pages

RR-93-16

Gert Smolka, Martin Henz, Jörg Würtz: Object-Oriented Concurrent Constraint Programming in Oz
17 pages

RR-93-17

Rolf Backofen: Regular Path Expressions in Feature Logic
37 pages

RR-93-18

Klaus Schild: Terminological Cycles and the Propositional μ -Calculus
32 pages

RR-93-20

Franz Baader, Bernhard Hollunder: Embedding Defaults into Terminological Knowledge Representation Formalisms
34 pages

RR-93-22

Manfred Meyer, Jörg Müller: Weak Looking-Ahead and its Application in Computer-Aided Process Planning
17 pages

RR-93-23

Andreas Dengel, Ottmar Lutzy:
Comparative Study of Connectionist Simulators
20 pages

RR-93-24

Rainer Hoch, Andreas Dengel:
Document Highlighting —
Message Classification in Printed Business Letters
17 pages

RR-93-25

Klaus Fischer, Norbert Kuhn: A DAI Approach to
Modeling the Transportation Domain
93 pages

RR-93-26

Jörg P. Müller, Markus Pischel: The Agent
Architecture InterRAP: Concept and Application
99 pages

RR-93-27

Hans-Ulrich Krieger:
Derivation Without Lexical Rules
33 pages

RR-93-28

Hans-Ulrich Krieger, John Nerbonne,
Hannes Pirker: Feature-Based Allomorphy
8 pages

RR-93-33

Bernhard Nebel, Jana Koehler:
Plan Reuse versus Plan Generation: A Theoretical
and Empirical Analysis
33 pages

RR-93-34

Wolfgang Wahlster:
Verbmobil Translation of Face-To-Face Dialogs
10 pages

RR-93-35

Harold Boley, François Bry, Ulrich Geske (Eds.):
Neuere Entwicklungen der deklarativen KI-
Programmierung — *Proceedings*
150 Seiten

Note: This document is available only for a
nominal charge of 25 DM (or 15 US-\$).

RR-93-36

Michael M. Richter, Bernd Bachmann, Ansgar
Bernardi, Christoph Klauck, Ralf Legleitner,
Gabriele Schmidt: Von IDA bis IMCOD:
Expertensysteme im CIM-Umfeld
13 Seiten

RR-93-38

Stephan Baumann: Document Recognition of
Printed Scores and Transformation into MIDI
24 pages

RR-93-41

Winfried H. Graf: LAYLAB: A Constraint-Based
Layout Manager for Multimedia Presentations
9 pages

DFKI Technical Memos**TM-91-13**

Knut Hinkelmann: Forward Logic Evaluation:
Developing a Compiler from a Partially Evaluated
Meta Interpreter
16 pages

TM-91-14

Rainer Bleisinger, Rainer Hoch, Andreas Dengel:
ODA-based modeling for document analysis
14 pages

TM-91-15

Stefan Busemann: Prototypical Concept Formation
An Alternative Approach to Knowledge Representation
28 pages

TM-92-01

Lijuan Zhang: Entwurf und Implementierung eines
Compilers zur Transformation von
Werkstückrepräsentationen
34 Seiten

TM-92-02

Achim Schupeta: Organizing Communication and
Introspection in a Multi-Agent Blocksworld
32 pages

TM-92-03

Mona Singh:
A Cognitive Analysis of Event Structure
21 pages

TM-92-04

Jürgen Müller, Jörg Müller, Markus Pischel,
Ralf Scheidhauer:
On the Representation of Temporal Knowledge
61 pages

TM-92-05

Franz Schmalhofer, Christoph Globig, Jörg Thoben:
The refitting of plans by a human expert
10 pages

TM-92-06

Otto Kühn, Franz Schmalhofer: Hierarchical
skeletal plan refinement: Task- and inference
structures
14 pages

TM-92-08

Anne Kilger: Realization of Tree Adjoining
Grammars with Unification
27 pages

TM-93-01

Otto Kühn, Andreas Birk: Reconstructive Integrated
Explanation of Lathe Production Plans
20 pages

TM-93-02

Pierre Sablayrolles, Achim Schupeta:
Conflict Resolving Negotiation for COoperative
Schedule Management
21 pages

DFKI Documents**D-92-19**

Stefan Dittrich, Rainer Hoch: Automatische, Deskriptor-basierte Unterstützung der Dokumentanalyse zur Fokussierung und Klassifizierung von Geschäftsbriefen
107 Seiten

D-92-21

Anne Schauder: Incremental Syntactic Generation of Natural Language with Tree Adjoining Grammars
57 pages

D-92-22

Werner Stein: Indexing Principles for Relational Languages Applied to PROLOG Code Generation
80 pages

D-92-23

Michael Herfert: Parsen und Generieren der Prologartigen Syntax von RELFUN
51 Seiten

D-92-24

Jürgen Müller, Donald Steiner (Hrsg.): Kooperierende Agenten
78 Seiten

D-92-25

Martin Buchheit: Klassische Kommunikations- und Koordinationsmodelle
31 Seiten

D-92-26

Enno Tolzmann: Realisierung eines Werkzeugauswahlmoduls mit Hilfe des Constraint-Systems CONTAX
28 Seiten

D-92-27

Martin Harm, Knut Hinkelmann, Thomas Labisch: Integrating Top-down and Bottom-up Reasoning in COLAB
40 pages

D-92-28

Klaus-Peter Gores, Rainer Bleisinger: Ein Modell zur Repräsentation von Nachrichtentypen
56 Seiten

D-93-01

Philipp Hanschke, Thom Frühwirth: Terminological Reasoning with Constraint Handling Rules
12 pages

D-93-02

Gabriele Schmidt, Frank Peters, Gernod Laufkötter: User Manual of COKAM+
23 pages

D-93-03

Stephan Busemann, Karin Harbusch(Eds.): DFKI Workshop on Natural Language Systems: Reusability and Modularity - Proceedings
74 pages

D-93-04

DFKI Wissenschaftlich-Technischer Jahresbericht 1992
194 Seiten

D-93-05

Elisabeth André, Winfried Graf, Jochen Heinsohn, Bernhard Nebel, Hans-Jürgen Profillich, Thomas Rist, Wolfgang Wahlster: PPP: Personalized Plan-Based Presenter
70 pages

D-93-06

Jürgen Müller (Hrsg.): Beiträge zum Gründungsworkshop der Fachgruppe Verteilte Künstliche Intelligenz Saarbrücken 29.-30. April 1993
235 Seiten
Note: This document is available only for a nominal charge of 25 DM (or 15 US-\$).

D-93-07

Klaus-Peter Gores, Rainer Bleisinger: Ein erwartungsgesteuerter Koordinator zur partiellen Textanalyse
53 Seiten

D-93-08

Thomas Kieninger, Rainer Hoch: Ein Generator mit Anfragesystem für strukturierte Wörterbücher zur Unterstützung von Texterkennung und Textanalyse
125 Seiten

D-93-09

Hans-Ulrich Krieger, Ulrich Schäfer: TDL ExtraLight User's Guide
35 pages

D-93-10

Elizabeth Hinkelman, Markus Vonerden, Christoph Jung: Natural Language Software Registry (Second Edition)
174 pages

D-93-11

Knut Hinkelmann, Armin Laux (Eds.): DFKI Workshop on Knowledge Representation Techniques — Proceedings
88 pages

D-93-12

Harold Boley, Klaus Elsbernd, Michael Herfert, Michael Sintek, Werner Stein: RELFUN Guide: Programming with Relations and Functions Made Easy
86 pages

D-93-14

Manfred Meyer (Ed.): Constraint Processing — Proceedings of the International Workshop at CSAM'93, July 20-21, 1993
264 pages
Note: This document is available only for a nominal charge of 25 DM (or 15 US-\$).

D-93-04
DFKI Wissenschaftlich-Technischer Jahresbericht
1992
194 Seiten

D-93-05
Elisabeth André, Winfried Grotz, Jochen Heintz, A.
Bernd Hebel, Hans-Jürgen Pfeiffer, Thomas
Ritz, Wolfgang Winkler
PPT: Personalized Plan-Based Presenter
70 pages

D-93-06
Jürgen Müller (Hrsg.)
Beiträge zum Gründungsworkshop der Fachgruppe
Vorlesende Künstliche Intelligenz Saarbrücken 29.-
30. April 1993
235 Seiten
Note: This document is available only for a
nominal charge of 25 DM (or 12 US\$).

D-93-07
Klaus-Peter Götz, Rainer Bießinger
Ein erwartungsgesteuerter Koordinator zur partitiven
Textanalyse
23 Seiten

D-93-08
Thomas Krieger, Rainer Höck, Ein Generator mit
Anfangssystem für strukturierte Wörterbücher zur
Unterstützung von Texterkennung und Textanalyse
122 Seiten

D-93-09
Hans-Ulrich Kreiser, Ulrich Schäfer
TDL: Extensible User's Guide
32 pages

D-93-10
Elisabeth Heintz, Markus Vorderen, Christoph
Jung, Natural Language Software Registry
(Second Edition)
174 pages

D-93-11
Karl Heintz, Armin Lutz (Eds.)
DFKI Workshop on Knowledge Representation
Techniques — Proceedings
88 pages

D-93-12
Herold Böley, Klaus Elstner, Michael Heffner,
Michael Stank, Werner Stein
RELFUN Guide: Programming with Relations and
Functions Made Easy
86 pages

D-93-14
Manfred Meyer (Ed.): Constraint Processing —
Proceedings of the International Workshop at
CSAM'93, July 20-21, 1993
284 pages
Note: This document is available only for a
nominal charge of 25 DM (or 12 US\$).

DFKI Documents

D-93-19
Stefan Dünch, Rainer Höck, Antoniusche,
Deskriptor-basierte Unterbreitung der Dokument-
analyse zur Fokussierung und Klassifizierung von
Gesprächen
107 Seiten

D-93-21
Aare Schuster: Incremental Syntactic Generation of
Natural Language with Free Adjoining Grammars
27 pages

D-93-22
Werner Zech: Indexing Principles for Relational
Languages Applied to PROLOG Code Generation
80 pages

D-93-23
Michael Heffner: Parsen und Generieren der Prolog-
artigen Syntax von RELFUN
21 Seiten

D-93-24
Jürgen Müller, Donald Ziebar (Hrsg.)
Kooperierende Agenten
78 Seiten

D-93-25
Martin Bacher: Klassische Kommunikations- und
Koordinationsmodelle
31 Seiten

D-93-26
Erno Tolzmann
Realisierung eines Werkzeugauswahlmoduls mit
Hilfe des Constraint-Systems CONTAX
28 Seiten


D-93-27
Martin Horn, Karl Heintz, Thomas Labisch
Inferenz Top-down and Bottom-up Reasoning in
COLAB
40 pages

D-93-28
Klaus-Peter Götz, Rainer Bießinger: Ein Modell
zur Repräsentation von Nachrichtentypen
26 Seiten

D-93-01
Philipp Hanselke, Thom Frühwirth, Terminological
Reasoning with Constraint Handling Rules
12 pages

D-93-02
Gabriele Schindl, Frank Peter,
Gerold Lauffer: User Manual of GOKAM+
22 pages

D-93-03
Stephan Busmann, Karl Heintz (Eds.)
DFKI Workshop on Natural Language Systems:
Resiliency and Modularity - Proceedings
74 pages

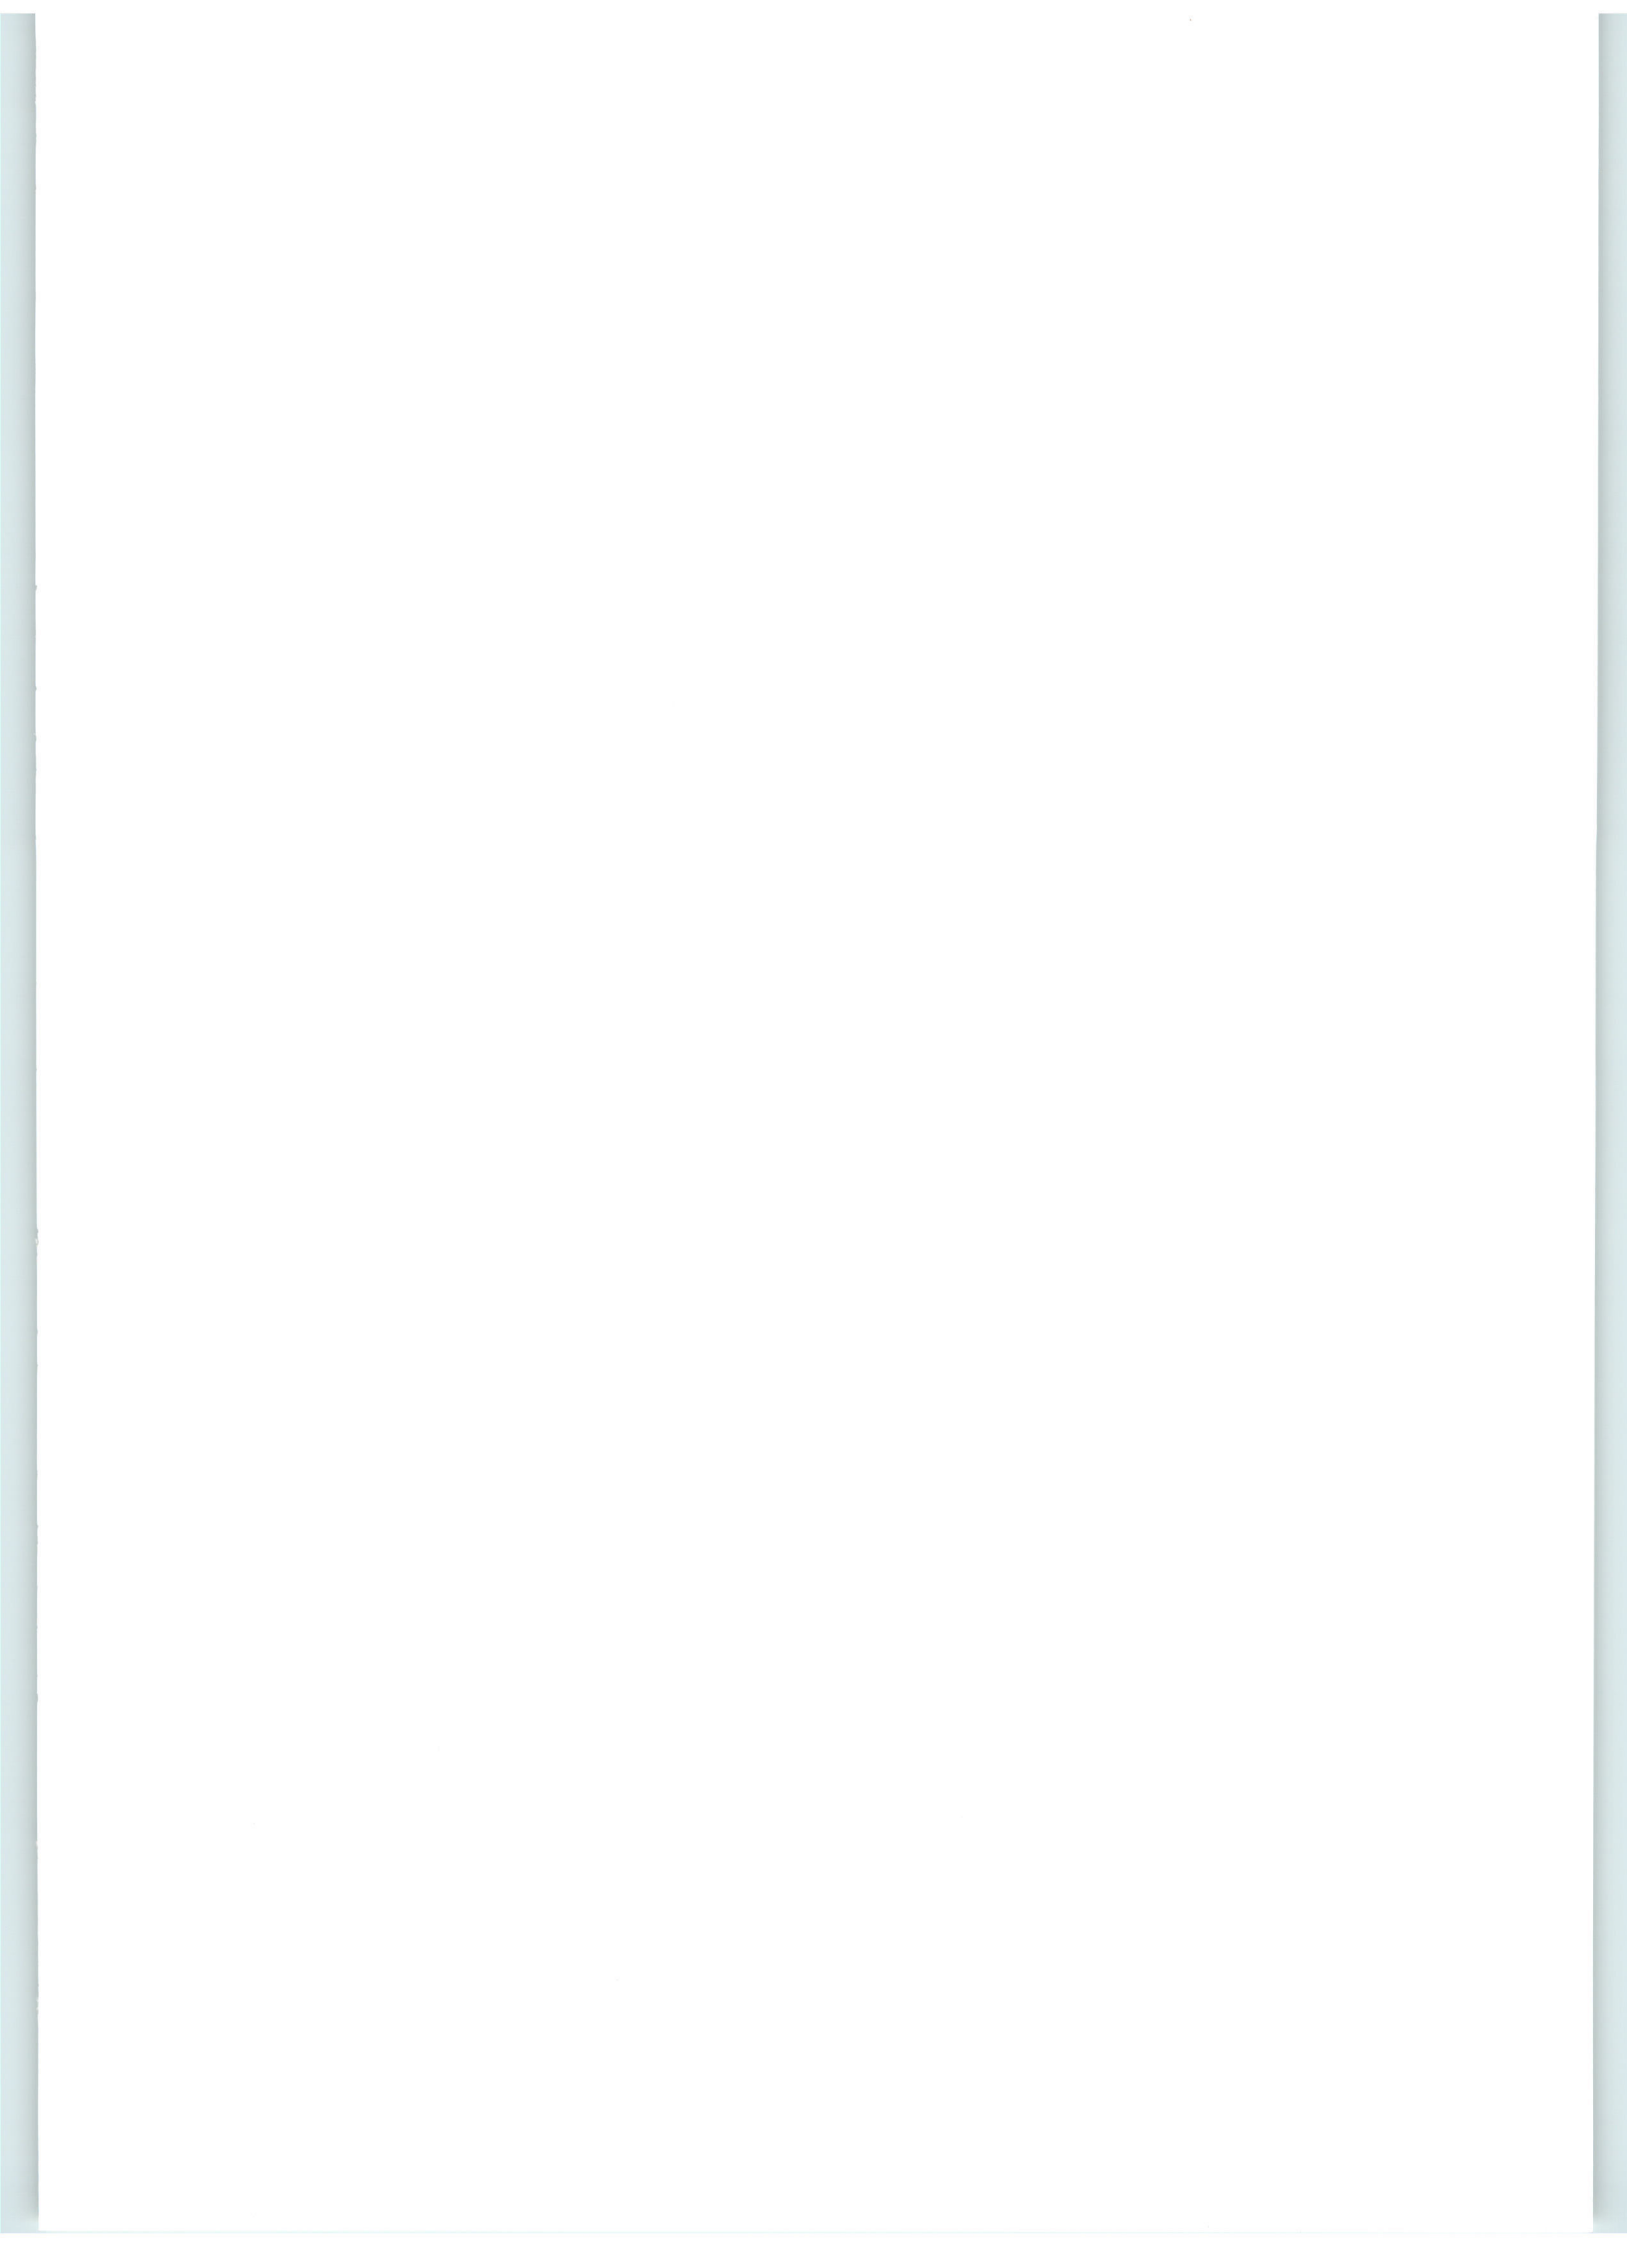

**LAYLAB:
A Constraint-Based Layout Manager for Multimedia Presentations**
Winfried H. Graf

RR-93-41
Research Report